





ULTRA LOW WASTE FILTER

An economical filter designed specifically for lower flow municipal and industrial applications.

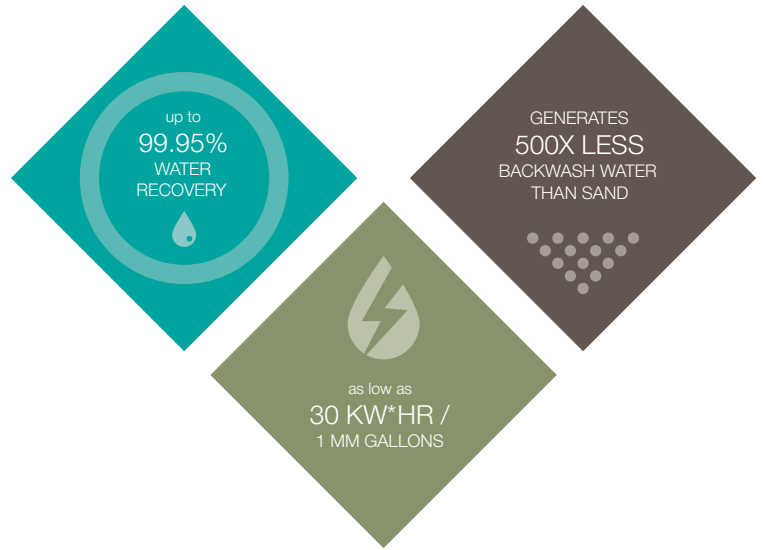

Model	25		65		100		250		440	
Dimensions LxWxH	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
	29X28X25	737x712x615	39x38x35	991x966x873	44x43x42	1118x1093x1051	61x57x56	1550x1448x1403	77x69x73	1956x1772x1863
Estimated Operating Weight	lbs	kg	lbs	kg	lbs	kg	lbs	kg	lbs	kg
	587	266	1176	533	2200	1000	4750	2159	11565	5246
Electrical - Single Phase	230V / 60Hz - 15 A		230V / 60Hz - 15 A		230V / 60Hz - 30 A		230V / 60Hz - 30 A		230V / 60Hz - 30 A	
Typical Flow Rates*: GPM (m ³ /hr)	GPM	m ³ /hr	GPM	m ³ /hr	GPM	m ³ /hr	GPM	m ³ /hr	GPM	m ³ /hr
Clean Water (< 5 ppm TSS)	25	5.7	65	14.5	100	22	250	57	440	100
ADF Tertiary (< 30 ppm TSS)	11	2.5	24	5.5	41	9.2	91	20.7	169	38.4
PDF Tertiary (< 30 ppm TSS)	22	5	49	11	81	18.5	182	41.3	338	76.7

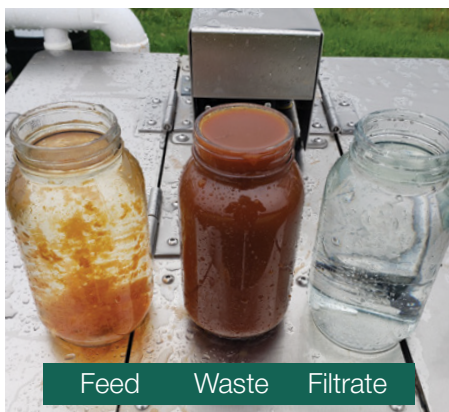

- Reduce TSS, BOD and More
- Plug & Play Ready
- Built Rugged
- Novel Cleaning for Reliable Performance

APPLICATIONS

Tertiary Filtration	Cooling Tower Side Streams
Wastewater Polishing	MF/UF Pretreatment
Total Phosphorous Removal	Algae Removal
Primary Filtration	Aquaculture & Aquaponics
Water Reuse	And More

Ask about an on-site demo: 1-713- 999-AQUA (2782) • info@aquapyr.com

