





# ULTRA LOW WASTE FILTER

An economical filter designed specifically for lower flow municipal and industrial applications.

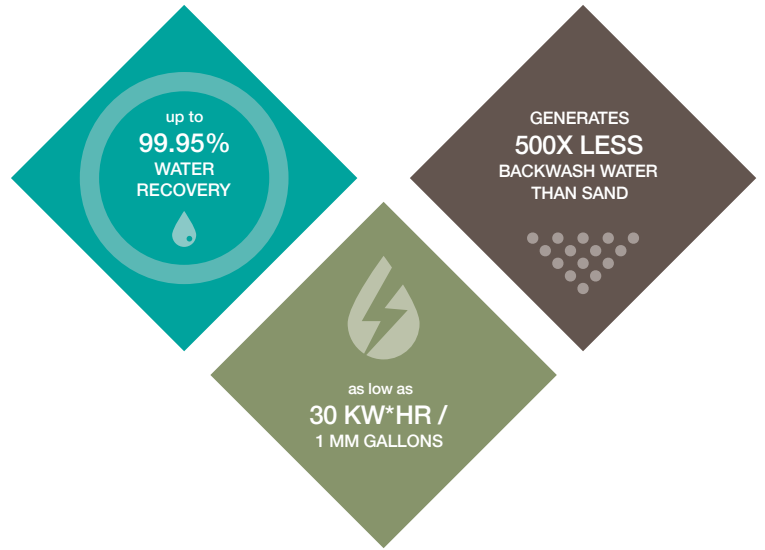

Model	25		65		100		250		440	
<b>Dimensions LxWxH</b>	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
	29X28X25	737x712x615	39x38x35	991x966x873	44x43x42	1118x1093x1051	61x57x56	1550x1448x1403	77x69x72	1956x1772x1838
<b>Estimated Operating Weight</b>	lbs	kg	lbs	kg	lbs	kg	lbs	kg	lbs	kg
	600	300	1200	550	2200	1000	4800	2200	12750	5800
<b>Electrical - Single Phase</b>	115 (230V) 60Hz - 20 (15) A		115 (230V) 60Hz - 20 (15) A		230V / 60Hz - 30 A		230V / 60Hz - 30 A		230V / 60Hz - 50 A	
<b>Typical Flow Rates*: GPM (m³/hr)</b>	GPM	m³/hr	GPM	m³/hr	GPM	m³/hr	GPM	m³/hr	GPM	m³/hr
<b>Clean Water (&lt; 5 ppm TSS)</b>	25	5.7	65	14.5	100	22	250	57	440	100
<b>ADF Tertiary (&lt; 30 ppm TSS)</b>	11	2.5	24	5.5	41	9.2	91	20.7	169	38.4
<b>PDF Tertiary (&lt; 30 ppm TSS)</b>	22	5	49	11	81	18.5	182	41.3	338	76.7
<b>High Solids (&lt;250 ppm TSS)</b>	7	1.6	15	3.4	25	5.67	56	12.7	104	23.6

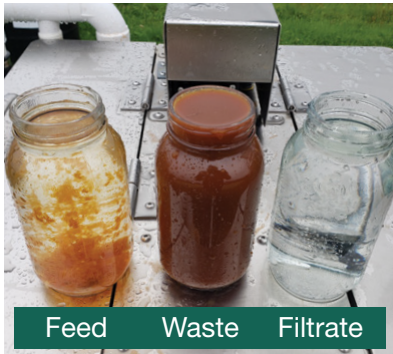

- Reduce TSS, BOD and More
- Plug & Play Ready
- Built Rugged
- Novel Cleaning for Reliable Performance

## APPLICATIONS

- Tertiary Filtration
- Wastewater Polishing
- Total Phosphorous Removal
- Primary Filtration
- Water Reuse
- Cooling Tower Side Streams
- MF/UF Pretreatment
- Algae Removal
- Aquaculture & Aquaponics
- And More

Ask about an on-site demo: 1-713-999-AQUA (2782) • info@aquapyr.com

\*Consult factory for a filter sizing specific to your application.

